


### Description

Ryanfire SL Fire Collars are a stainless steel casing with fixing legs, pre lined with a Ruberoid graphite loaded strap most commonly fixed around combustible Insulation, cable bundles or combustible pipes. They have a slimline profile to minimise service clearance.

### Installation Basic requirements


Position SL Collar hard up against the surface of the fixing substrate, secure mild steel fixings through each leg of the collar to a minimum embedment of 25mm

Single layer plasterboard applications require hollow wall Anchors.

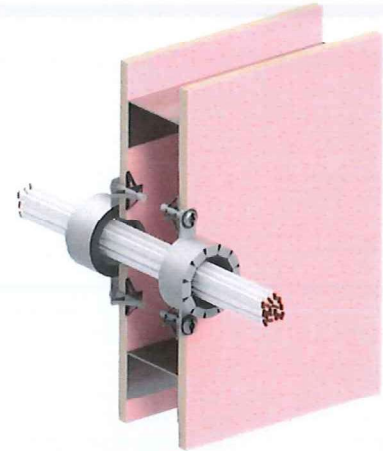

### Technical Info.

- Standard sizes from 32mm to 160mm diameter
- Stainless Steel
- Retro-Fit capable
- Tested to AS1530:2014 / AS4072.1-2005 at IANZ accredited laboratories
- FPANZ Passive Product Registered.
- Suitable for single layer plasterboard walls and ceilings.

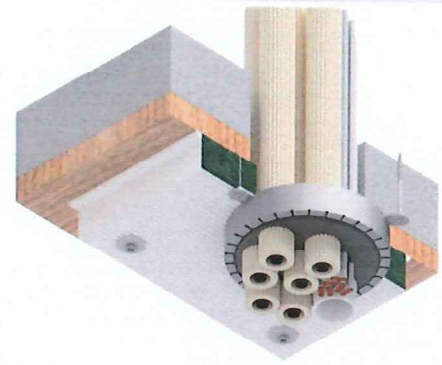

### Applications.


Suitable for use around various types of insulation, combustible pipes, cables and Pair coil services. Ryanfire SL collars are tested on various floor substrates including trapezoidal tray-deck composite floors, timber infill, masonry and precast concrete.

### Specification Guide/Wording:

*"Install Ryanfire SL Collar in accordance with relevant system datasheets, and as per manufacturer's instructions"*

Contact Ryanfire Technical for related system datasheets and further information.

[info@ryanfire.co.nz](mailto:info@ryanfire.co.nz)

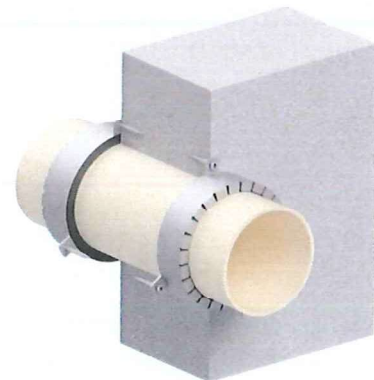

*The information in this data sheet is issued in good faith. Ryanfire Products Ltd can accept no responsibility for omissions or errors in content or interpretation.*

# Product Data Sheet

## Ryanfire HPX

### Fire Rated Sealant

#### Product Description

Ryanfire HPX fire pressure exerting sealant is a specialised cohesive sealant used for sealing apertures around service penetrations passing through fire rated separations. It is a water based acrylic resin formulation that dries quickly on application.

#### Applications

- Cables
- Combustible pipes
- Cable conduits
- Non-combustible pipes

#### Fire Testing




Tested in accordance with AS 1530.4-2014.  
Third party accredited by Exova Warringtonfire.  
FPANZ Passive Product Registered.

#### Dimension and Colour

Tube size: 310ml.  
Colour: Grey.

***Ryanfire recommend that all fire stopping products should be installed by a third-party accredited fire stopping contractor. Full application details and methodology instructions should be requested before installation of the product. Please consult literature of Ryanfire technical department.***

*The information in this data sheet is issued in good faith. Ryanfire Products Ltd can accept no responsibility for omissions or errors in content or interpretation.*

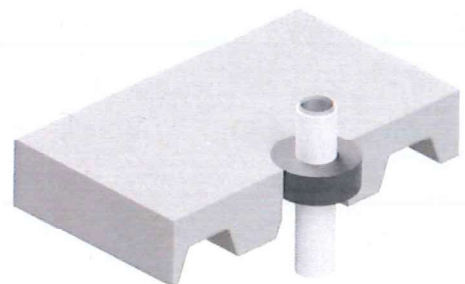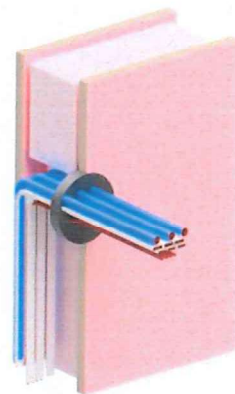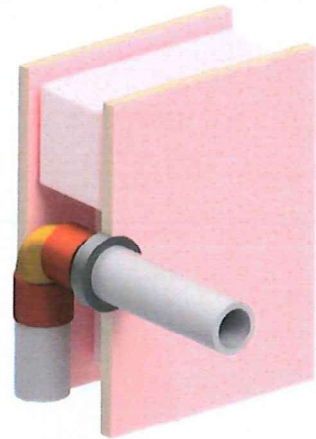



# RYANFIRE MASTIC

## Product Description

Ryanfire Mastic is an internal use water-borne acrylic sealant with fire and smoke resisting capability for sealing apertures around service penetrations passing through fire rated separations and Ryanfire high density rock fibre board.

## Applications

- Cables
- Non-combustible pipes
- Smoke sealing Ryanfire SL Collar systems
- Ryanfire Batt tested systems including the Naked Wall and Floor Systems

## Fire Testing

Tested in accordance with AS 1530.4-2014.

Third party accredited by Exova Warringtonfire and PFITS Laboratory testing authorities.

FPANZ Passive Product Registered.

## Dimension and Colour

Unit size: 310ml tube, 600ml sausage and 5L pail.

Colour: White and grey.

Ryanfire Products Ltd recommend that all fire stopping products should be installed by a third-party accredited fire stopping contractor or competent person. Full application details and methodology instructions should be requested before installation of the product. Please consult literature of Ryanfire technical department for details.

*The information in this data sheet is issued in good faith. Ryanfire Products Ltd can accept no responsibility for omissions or errors in content or interpretation. Standard terms and conditions of sale apply.*

